



Simple and easy appearance, in line with contemporary aesthetic concept. The product has the structure and appearance design patent. High efficiency constant current driver, ensure the light source is maximum used. can be easily installed in any type of space, to create amazing light effects, The LED is set back to minimize glare. The main body is made of die-cast aluminum that guarantees optimum heat dissipation with single optic lens family in the most popular sizes and beams with excellent color rendering, and Supreme light quality.

The AYA Recessed ceiling luminaries adaptable for indoor applications.

High Lumen Efficacy 115 lm/W - UGR<19
 Body - Die cast aluminum housing with solvent free powder coating
 Diffuser - polycarbonate pattern lens
 Glowing Wire Test - 850°
 Temperature - of=20 °C ~ of max=50 °C



FIELDS OF APPLICATION:

Decorative lighting, stairway and hallway lighting, desk lighting.

AYA-A-1-7-27-W-3W



Model --- **AYA**

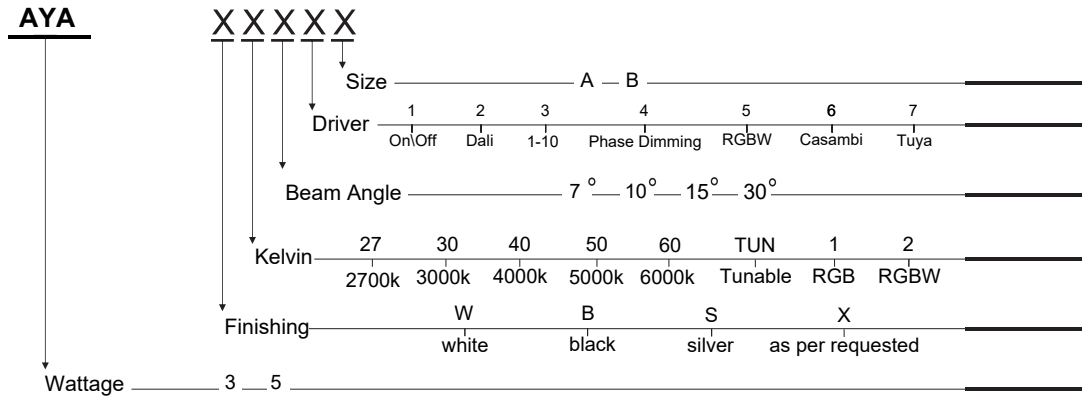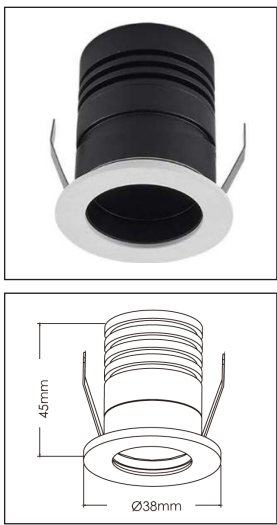

Lighting Customization Solution can offer you modifications for environment with higher options as a customized product.


IP44 SMD McA Step 3 220-240V



A - Ø 38-45mm 30mm
 B - Ø 48-52mm 40mm

Relative spectral perception of brightness and melanopic effect

Effect as a percentage


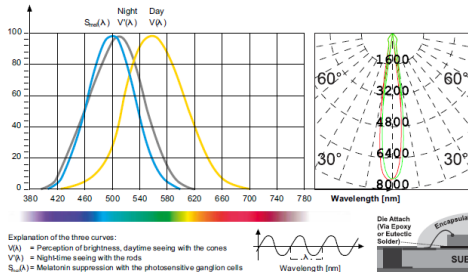


Explanation of the three curves:
 S_d(A) = Perception of brightness, daytime seeing with the cones
 S_m(A) = Nighttime seeing with the rods
 S_m(A) = Melatonin suppression with the photosensitive ganglion cells

Die Attach Via Epoxy or Eutectic Solder



Available Accessories

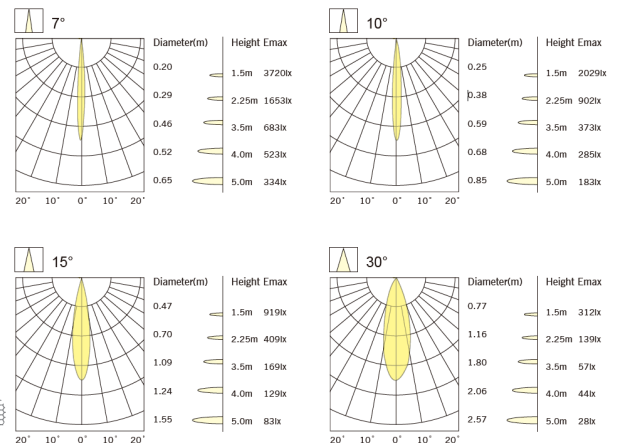

LED life time		Operating time 1.000 h										
Lamp Lumen Maintenance Factor		1	10	20	30	40	50	60	70	80	90	100
Lamp Survival Factor		1	1	1	1	1	1	1	1	0.99	0.99	0.99
L80	50.000 h	LLMF	1	0.96	0.92	0.88	0.84	0.80	0.76	0.72	0.68	0.60
		LSF	1	1	1	1	1	1	0.99	0.99	0.99	0.98
L80	100.000 h	LLMF	1	0.98	0.96	0.94	0.92	0.90	0.88	0.86	0.84	0.80
		LSF	1	1	1	1	1	1	1	0.99	0.99	0.99



LED

AC220-240V

series wiring

