



Simple and easy appearance, in line with contemporary aesthetic concept. Ideal choices of size and design, this range is suitable for every wall. The product has the structure and appearance design patent. can be easily installed in any type of space, to create amazing light effects.

FIELDS OF APPLICATION:



Living spaces, villas, residential, offices, showrooms, hotels, restaurants, buildings, hospitals, shopping malls, supermarket, convention centers, galleries, etc.

The EVA Recessed Frame adaptable for indoor applications.

High Lumen Efficacy 115 lm/W - UGR<19
 Body - Die cast aluminum housing with solvent free powder coating
 Reflector - Anodized aluminum
 Diffuser - polycarbonate pattern lens
 Glowing Wire Test - 850°
 Temperature - of=20 °C ~ of max=50 °C

Model --- **EVA**

EVA-A-1-15-27-W-3W

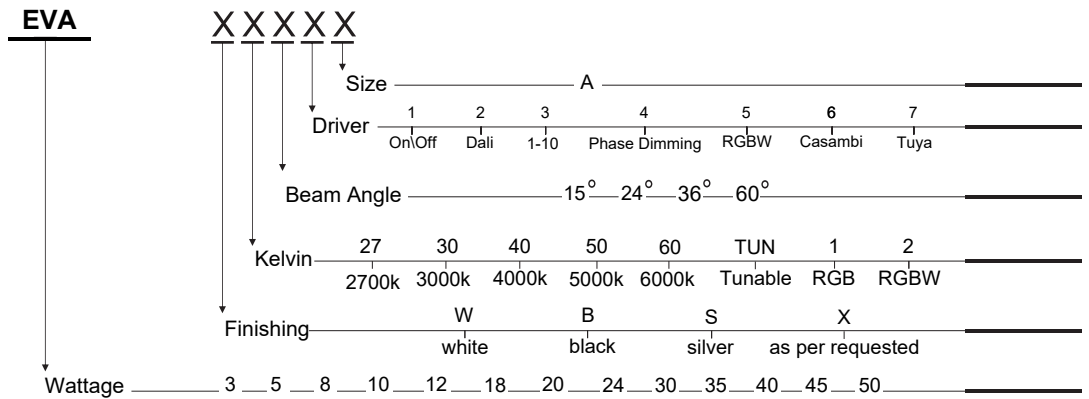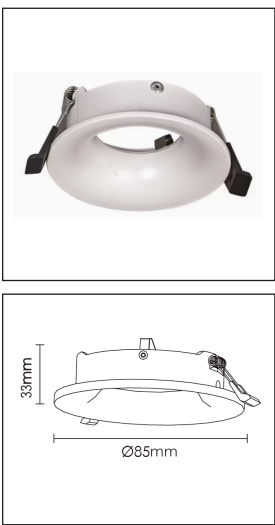

Lighting Customization Solution can offer you modifications for environment with higher options as a customized product.


IP20 COB McA Step 3 220-240V




A - Ø 85-33mm 75mm

Relative spectral perception of brightness and melanopic effect


Effect as a percentage

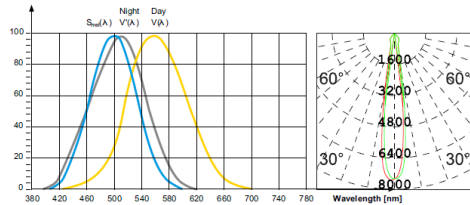

Explanation of the three curves:
 V(A) = Perception of brightness, daytime seeing with the cones
 V_n(A) = Nighttime seeing with the rods
 S_n(A) = Melatonin suppression with the photosensitive ganglion cells

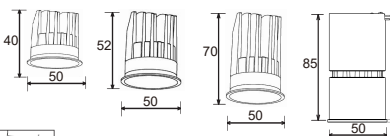


15°




Diameter(m)	Height Emax
0.42	1.5m 1353lx
0.63	2.25m 601lx
0.99	3.5m 249lx
1.13	4.0m 190lx
1.41	5.0m 122lx

24°




Diameter(m)	Height Emax
0.57	1.5m 969lx
0.86	2.25m 431lx
1.34	3.5m 178lx
1.53	4.0m 136lx
1.91	5.0m 87lx

36°




Diameter(m)	Height Emax
0.94	1.5m 509lx
1.41	2.25m 226lx
2.20	3.5m 94lx
2.51	4.0m 72lx
3.14	5.0m 46lx

60°



Diameter(m)	Height Emax
1.60	1.5m 601lx
2.40	2.25m 267lx
3.73	3.5m 110lx
4.26	4.0m 85lx
5.33	5.0m 54lx

Available Accessories



LED life time		Operating time 1.000 h										
Lamp Lumen Maintenance Factor	Lamp Survival Factor	1	10	20	30	40	50	60	70	80	90	100
L80	50.000 h	LLMF	1	0.96	0.92	0.88	0.84	0.80	0.76	0.72	0.68	0.60
		LSF	1	1	1	1	1	1	0.99	0.99	0.99	0.98
L80	100.000 h	LLMF	1	0.98	0.96	0.94	0.92	0.90	0.88	0.86	0.84	0.80
		LSF	1	1	1	1	1	1	0.99	0.99	0.99	0.99

