



Simple and easy appearance, in line with contemporary aesthetic concept. The product has the structure and appearance design patent. High efficacy constant current driver, ensure the light source is maximum used. can be easily installed in any type of space, to create amazing light effects.

**FIELDS OF APPLICATION:**

Staircases, Hallways, Basements or Lower Levels, Entryways. etc.


The HAJER Wall Light adaptable for outdoor applications.

High Lumen Efficacy 115 lm/W - UGR<19  
Body - Die cast aluminum housing with solvent free powder coating  
Diffuser - polycarbonate pattern lens  
Glowing Wire Test - 850°  
Temperature - of=20 °C ~ of max=50 °C

**HAJER-A-1-15-27-W-3W**



Model --- **HAJER**

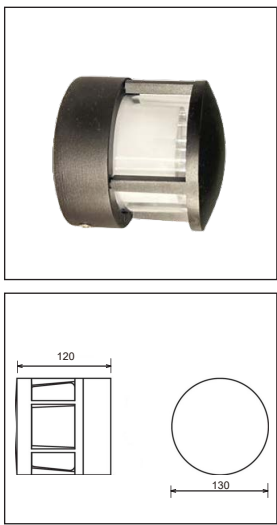

**HAJER**

X X X X X

Size	A — B — C						
Driver	1	2	3	4	5	6	7
	On/Off	Dali	1-10	Phase Dimming	RGBW	Casambi	Tuya
Beam Angle	15° — 24° — 36° — 60°						
Kelvin	27	30	40	50	60	TUN	1
	2700k	3000k	4000k	5000k	6000k	Tunable	RGB
Finishing	W		B		G	X	
	white		black		Gray	as per requested	
Wattage	3 — 5 — 9 — 12						

Lighting Customization Solution can offer you modifications for environment with higher options as a customized product.

IP65      LAMP      McA Step 3      220-240V




**B - Ø 130-130-120mm**


**C - Ø 160-160-135mm**

**Relative spectral perception of brightness and melanopic effect**

Effect as a percentage

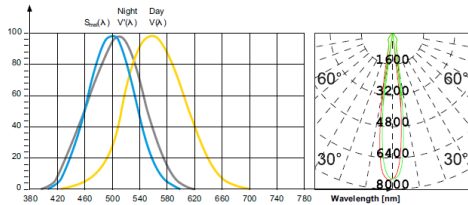

Explanation of the three curves:  
V(A) = Perception of brightness, daytime seeing with the cones  
V'(A) = Nighttime seeing with the rods  
S\_n(A) = Melanotin suppression with the photosensitive ganglion cells

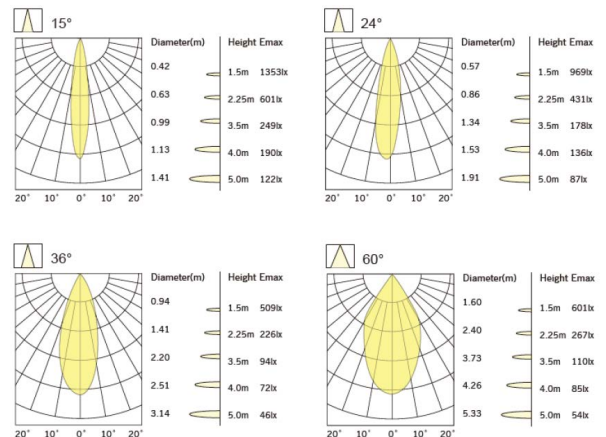

LED life time		Operating time 1.000 h										
Lamp Lumen Maintenance Factor	Lamp Survival Factor	1	10	20	30	40	50	60	70	80	90	100
L80	50.000 h	LLMF	1	0.96	0.92	0.88	0.84	0.80	0.76	0.72	0.68	0.64
		LSF	1	1	1	1	1	1	0.99	0.99	0.99	0.98
L80	100.000 h	LLMF	1	0.98	0.96	0.94	0.92	0.90	0.88	0.86	0.84	0.82
		LSF	1	1	1	1	1	1	1	0.99	0.99	0.99



LED

AC220-240V

series wiring

