LEDDOMAIN
RE-LIFE YOUR FUTURE

SURFACE LIGHT

Simple and easy appearance, in line with contemporary aesthetic concept. The product has the structure and appearance design patent. The lamp body adopts high-pressure cast aluminum and aluminum alloy, the surface is coated with outdoor used powder , double anti-corrosion to extend service life. This lawn lamp series uses LED. High efficiency constant current driver, ensure the light source is maximum used.

FIELDS OF APPLICATION
Office & Education, offices, open-plan offices, conference rooms, conference rooms, reception areas, counters, galleries, hotels, restaurants, living spaces

IEC 62717 LED-modules for general lighting – Performance requirements
IEC 62722-2-1 Particular requirements for LED luminaires

High Lumen Efficacy 115lm/W
Body - Die cast aluminum housing with solvent free powder coating
Diffuser - PMMA polycarbonate pattern lens.
Glowing Wire Test - 850°
Temperature - ta=20 °C ~ ta max=50 °C
Class - III

Model --- **LILY**



A - Ø 90xH90mm
B - Ø 110xH122
C - Ø135xH150mm
D - Ø 170xH184mm
E - Ø 195xH192mm

Default Available

LILY-A-0-15-27-W-6W

Product Assistant Chart

LILY XXXXX

- Size — A — B — C — D — E
- Driver — 0 On/Off — 1 Dali — 2 Dimmable — 3 Phase Dimming — 4 1-10
- Beam Angle — 60°
- Kelvin — 27 2700K — 30 3000K — 40 4000K — 50 5000K — 60 6000K
- Finishing — W white — B black
- Wattage — 8 — 10 — 12 — 15 — 20 — 25 — 30 — 35 — 40 — 45 — 50

Lighting Customization Solution can offer you modifications for environment with higher options as a customized product.

IP65 **COB** **McA Step 3** **220~240V**

LIGHTING SOLUTIONS
TRIDONIC

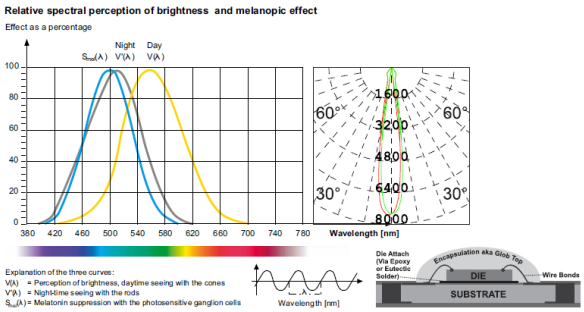

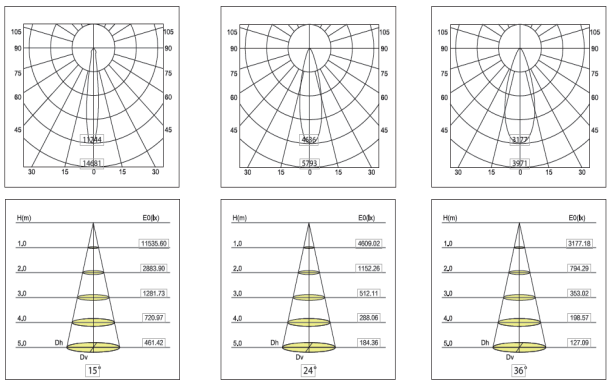

LED life time			Operating time 1.000 h									
Lamp Lumen Maintenance Factor			1	10	20	30	40	50	60	70	80	90	100
Lamp Survival Factor			1	1	1	1	1	1	1	1	0.99	0.99	0.99
L80	50.000 h	LLMF	1	0.96	0.92	0.88	0.84	0.80	0.76	0.72	0.68	0.64	0.60
		LSF	1	1	1	1	1	1	0.99	0.99	0.99	0.99	0.98
L80	100.000 h	LLMF	1	0.98	0.96	0.94	0.92	0.90	0.88	0.86	0.84	0.82	0.80
		LSF	1	1	1	1	1	1	1	0.99	0.99	0.99	0.99

A++ ENERGY LEVEL | LED | CRI>90 | series wiring | F | CE | UV | LM-80 | FLICKER FREE