




Simple and easy appearance, in line with contemporary aesthetic concept. The product has the structure and appearance design patent. The lamp body adopts high-pressure cast aluminum and aluminum alloy, the surface is coated with outdoor used powder, double anti-corrosion to extend service life. High efficiency constant current driver, ensure the light source is maximum used.

CRI: 90  
 Led Qty: 320LEDS/M  
 Length/Reel: 5M - 10M  
 Width: 5MM  
 Working Temperature:- 20~50°C  
 Storage Temperature: -30~80°C  
 Voltage Range: 23 ~25V dc  
 Reverse Voltage: : 25V dc

## ST-LD-COB-84019-5W-3K-IP67-320





Model --- **ST-LD-COB**

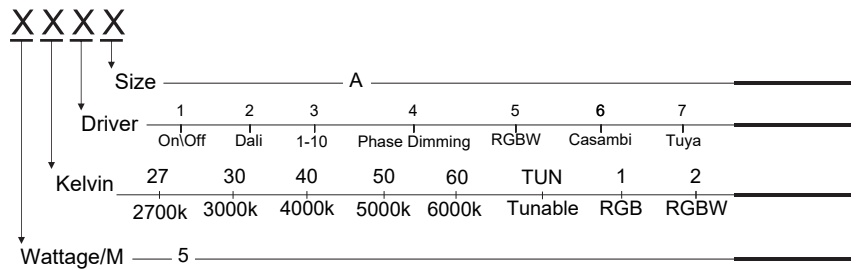

Lighting Customization Solution can offer you modifications for environment with higher options as a customized product.

IP67      COB      24V      320LED      5W/M

### LIGHT DISTRIBUTION

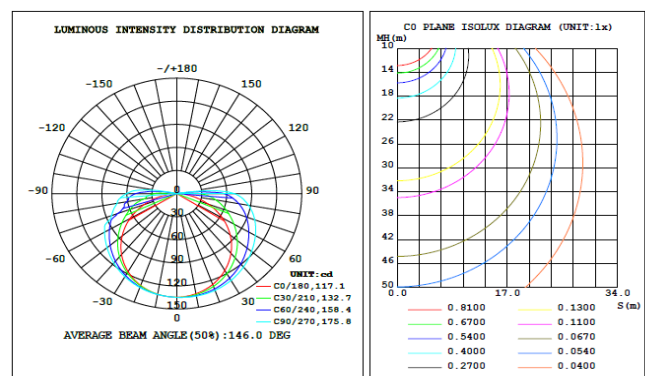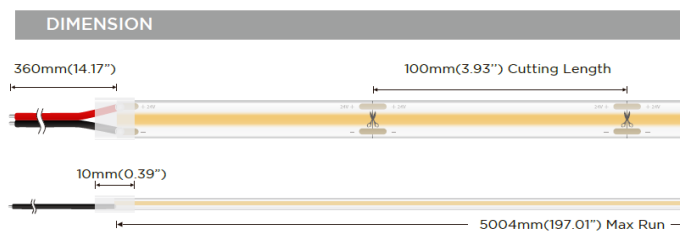

LED life time		Operating time 1.000 h										
Lamp Lumen Maintenance Factor		1	10	20	30	40	50	60	70	80	90	100
Lamp Survival Factor		1	1	1	1	1	1	1	1	0.99	0.99	0.99
L80	50.000 h	LLMF	1	0.96	0.92	0.88	0.84	0.80	0.76	0.72	0.68	0.60
		LSF	1	1	1	1	1	1	0.99	0.99	0.99	0.98
L80	100.000 h	LLMF	1	0.98	0.96	0.94	0.92	0.90	0.88	0.86	0.84	0.80
		LSF	1	1	1	1	1	1	1	0.99	0.99	0.99

+++ 01 +++