





Simple and easy appearance, in line with contemporary aesthetic concept. The product has the structure and appearance design patent. The lamp body adopts high-pressure cast aluminum and aluminum alloy, the surface is coated with outdoor used powder, double anti-corrosion to extend service life. High efficiency constant current driver, ensure the light source is maximum used.

CRI: 90
 Led Qty: 480LEDS/M
 Length/Reel: 5M
 Working Temperature:- 20~50°C
 Storage Temperature: -30~80°C
 Voltage Range: 23 ~25V dc
 Reverse Voltage : 25V dc

ST-LD-COB-84065-8W-3K-IP20



Model --- **ST-LD-COB**

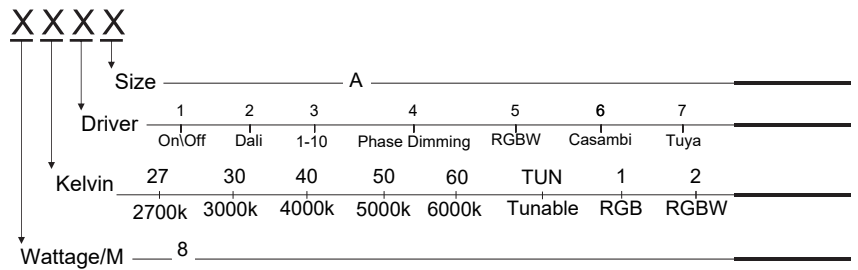


Lighting Customization Solution can offer you modifications for environment with higher options as a customized product.


IP20 COB 24V 480LED 8W/M



DIMENSION

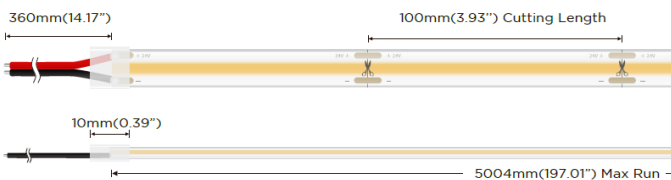

LIGHT DISTRIBUTION

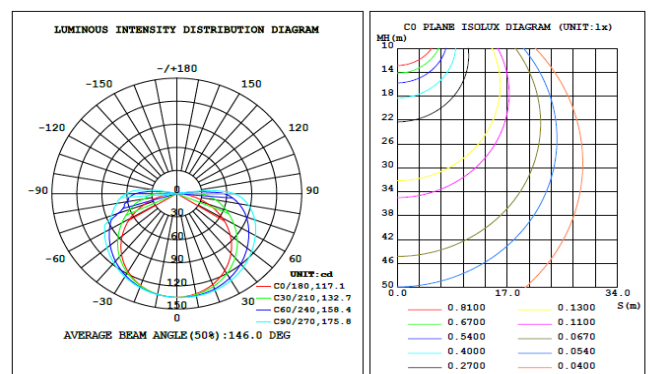

| LED life time | | Operating time 1.000 h | | | | | | | | | | | |
|-------------------------------|----------------------|------------------------|----|------|------|------|------|------|------|------|------|------|------|
| Lamp Lumen Maintenance Factor | Lamp Survival Factor | 1 | 10 | 20 | 30 | 40 | 50 | 60 | 70 | 80 | 90 | 100 | |
| L80 | 50.000 h | LLMF | 1 | 0.96 | 0.92 | 0.88 | 0.84 | 0.80 | 0.76 | 0.72 | 0.68 | 0.64 | 0.60 |
| | | LSF | 1 | 1 | 1 | 1 | 1 | 1 | 0.99 | 0.99 | 0.99 | 0.99 | 0.98 |
| L80 | 100.000 h | LLMF | 1 | 0.98 | 0.96 | 0.94 | 0.92 | 0.90 | 0.88 | 0.86 | 0.84 | 0.82 | 0.80 |
| | | LSF | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 0.99 | 0.99 | 0.99 | 0.99 |



LED

AC220-240V

series wiring



LM-80

