




Simple and easy appearance, in line with contemporary aesthetic concept. The product has the structure and appearance design patent. The lamp body adopts high-pressure cast aluminum and aluminum alloy, the surface is coated with outdoor used powder, double anti-corrosion to extend service life. High efficiency constant current driver, ensure the light source is maximum used.

CRI: 90
Led Qty: 480EDS/M
Length/Reel: 5M
Working Temperature:- 20~50°C
Storage Temperature: -30~80°C
Voltage Range: 23 ~25V dc
Reverse Voltage: : 25V dc

ST-LD-COB-84158-9W-3K-IP20-480




Model --- **ST-LD-COB-FLEXIBLE**




XXXX	Size	A						
Driver	1	2	3	4	5	6	7	
	On/Off	Dali	1-10	Phase Dimming	RGBW	Casambi	Tuya	
Kelvin	27	30	40	50	60	TUN	1	2
	2700k	3000k	4000k	5000k	6000k	Tunable	RGB	RGBW
Wattage/M	9							

Lighting Customization Solution can offer you modifications for environment with higher options as a customized product.


IP20 COB 24V 480LED 9W/M

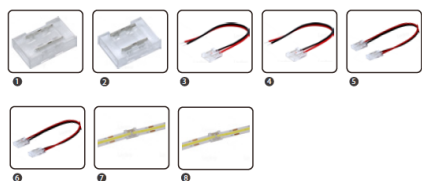

DIMENSION

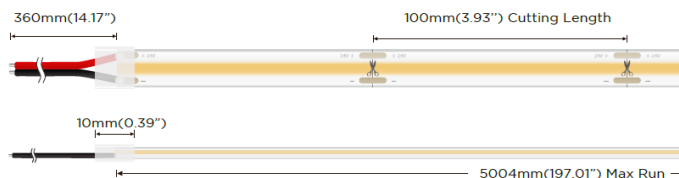

LIGHT DISTRIBUTION

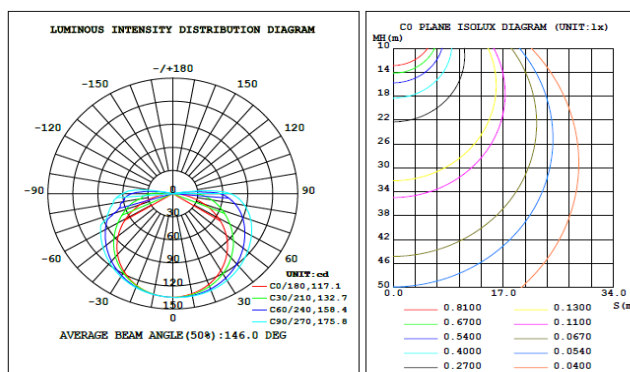

LED life time			Operating time 1.000 h										
Lamp Lumen Maintenance Factor			1	10	20	30	40	50	60	70	80	90	100
Lamp Survival Factor			1	1	1	1	1	1	1	1	0.99	0.99	0.99
L80	50.000 h	LLMF	1	0.96	0.92	0.88	0.84	0.80	0.76	0.72	0.68	0.64	0.60
		LSF	1	1	1	1	1	1	0.99	0.99	0.99	0.99	0.98
L80	100.000 h	LLMF	1	0.98	0.96	0.94	0.92	0.90	0.88	0.86	0.84	0.82	0.80
		LSF	1	1	1	1	1	1	1	0.99	0.99	0.99	0.99



LED

AC220-240V

series wiring

