





Simple and easy appearance, in line with contemporary aesthetic concept. The product has the structure and appearance design patent. The lamp body adopts high-pressure cast aluminum and aluminum alloy, the surface is coated with outdoor used powder, double anti-corrosion to extend service life. High efficiency constant current driver, ensure the light source is maximum used.

CRI: 90  
 Led Qty: 480EDS/M  
 Length/Reel: 5M  
 Working Temperature:- 20~50°C  
 Storage Temperature: -30~80°C  
 Voltage Range: 23 ~25V dc  
 Reverse Voltage : 25V dc

## ST-LD-COB-84166-9W-4K-IP20-480




Model --- **ST-LD-COB-FLEXIBLE**

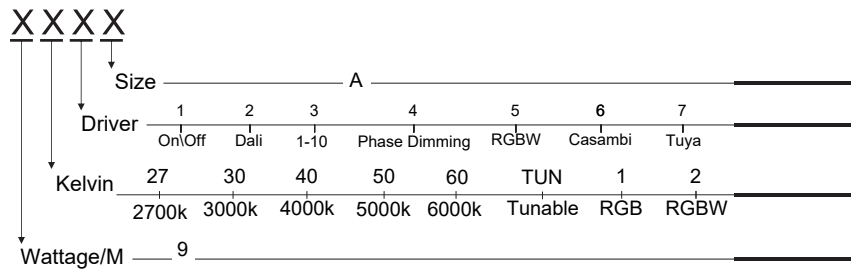


Lighting Customization Solution can offer you modifications for environment with higher options as a customized product.


IP20      COB      24V      480LED      9W/M

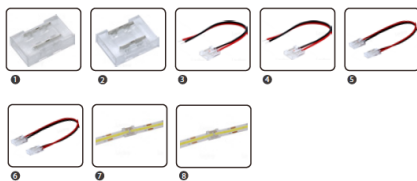

### DIMENSION

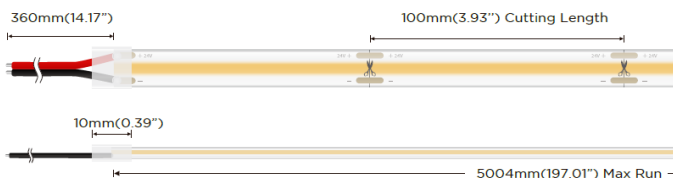

### LIGHT DISTRIBUTION

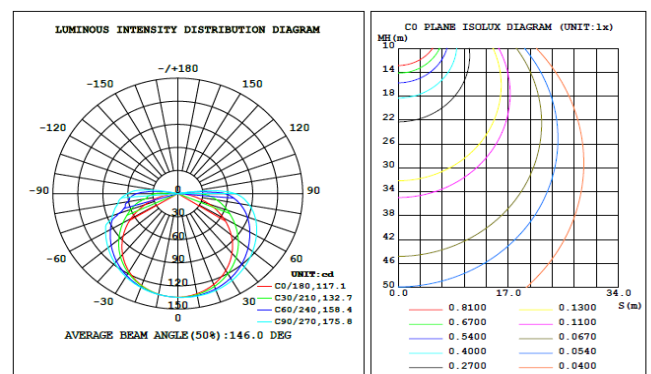

LED life time		Operating time 1.000 h											
Lamp Lumen Maintenance Factor	Lamp Survival Factor	1	10	20	30	40	50	60	70	80	90	100	
L80	50.000 h	LLMF	1	0.96	0.92	0.88	0.84	0.80	0.76	0.72	0.68	0.64	0.60
		LSF	1	1	1	1	1	1	0.99	0.99	0.99	0.99	0.98
L80	100.000 h	LLMF	1	0.98	0.96	0.94	0.92	0.90	0.88	0.86	0.84	0.82	0.80
		LSF	1	1	1	1	1	1	1	0.99	0.99	0.99	0.99



LED

AC220-240V

series wiring



LM-80

