



Simple and easy appearance, in line with contemporary aesthetic concept. The product has the structure and appearance design patent. High efficiency constant current driver, ensure the light source is maximum used. can be easily installed in any type of space, to create amazing light effects, The LED is set back to minimize glare. The main body is made of die-cast aluminum that guarantees optimum heat dissipation with single optic lens family in the most popular sizes and beams with excellent color rendering, and Supreme light quality.

The ANNA Recessed ceiling luminaires adaptable for indoor applications.

High Lumen Efficacy 115 lm/W - UGR<19
 Body - Die cast aluminum housing with solvent free powder coating
 Diffuser -polycarbonate pattern lens
 Glowing Wire Test - 850°
 Temperature - of=20 °C ~ of max=50 °C



FIELDS OF APPLICATION:

Decorative lighting, cabinets, desk lighting, etc.

ANNA-A-1-7-27-W-1W



Model --- **ANNA**

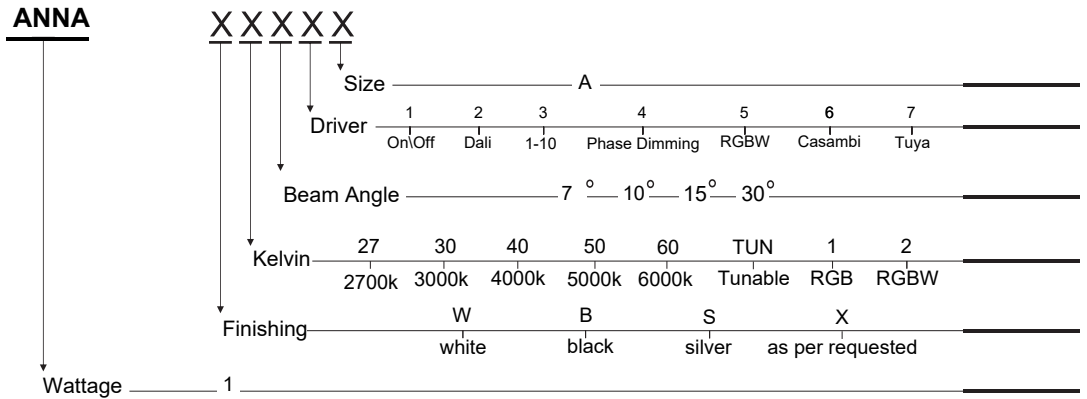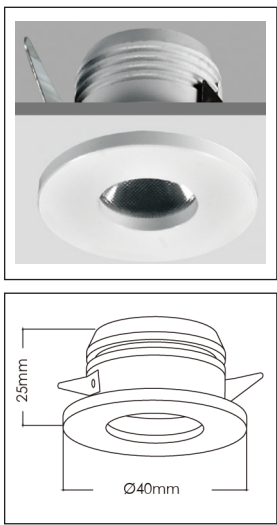

Lighting Customization Solution can offer you modifications for environment with higher options as a customized product.


IP20 SMD McA Step 3 220-240V




A - Ø 40-25mm 30mm

Relative spectral perception of brightness and melanopic effect



Effect as a percentage

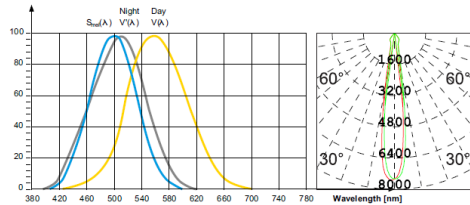

Explanation of the three curves:
 S_W(λ) = Perception of brightness, daytime seeing with the cones
 V'(λ) = Nighttime seeing with the rods
 S_M(λ) = Melatonin suppression with the photosensitive ganglion cells



Available Accessories

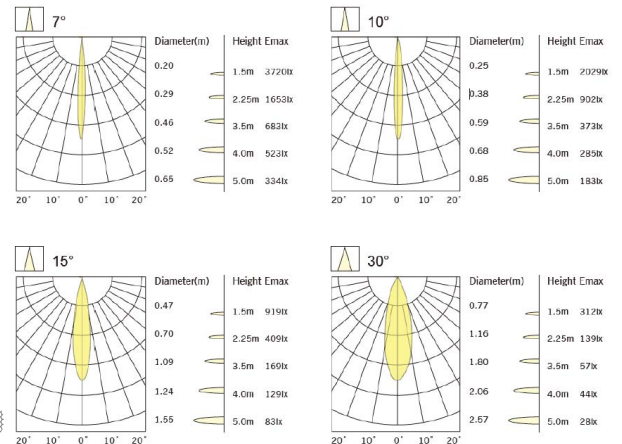

LED life time		Operating time 1.000 h										
Lamp Lumen Maintenance Factor		1	10	20	30	40	50	60	70	80	90	100
Lamp Survival Factor		1	1	1	1	1	1	1	1	0.99	0.99	0.99
L80	50.000 h	LLMF	1	0.96	0.92	0.88	0.84	0.80	0.76	0.72	0.68	0.64
		LSF	1	1	1	1	1	1	0.99	0.99	0.99	0.98
L80	100.000 h	LLMF	1	0.98	0.96	0.94	0.92	0.90	0.88	0.86	0.84	0.82
		LSF	1	1	1	1	1	1	1	0.99	0.99	0.99

