



Simple and easy appearance, in line with contemporary aesthetic concept. The product has the structure and appearance design patent. High efficiency constant current driver, ensure the light source is maximum used. can be easily installed in any type of space, to create amazing light effects, The LED is set back to minimize glare. The main body is made of die-cast aluminum that guarantees optimum heat dissipation with single optic lens family in the most popular sizes and beams with excellent color rendering, and Supreme light quality.

The CABI Recessed ceiling luminaries adaptable for both indoor and outdoor applications.

High Lumen Efficacy 115 lm/W - UGR<19
 Body - Die cast aluminum housing with solvent free powder coating
 Diffuser - polycarbonate pattern lens
 Glowing Wire Test - 850°
 Temperature - of=20 °C ~ of max=50 °C


FIELDS OF APPLICATION:

Decorative lighting, stairway and hallway lighting, desk lighting.

CABI-A-1-8-27-W-1W



Model --- **CABI**

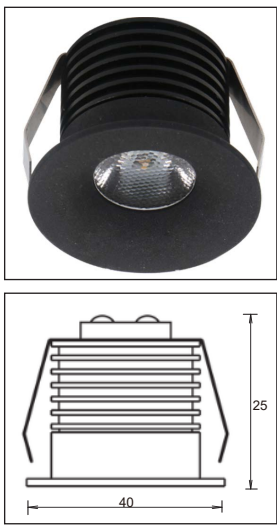

CABI

X X X X X

Size	A						
Driver	1	2	3	4	5	6	7
	On/Off	Dali	1-10	Phase Dimming	RGBW	Casambi	Tuya
Beam Angle	8° 10° 15° 20°						
Kelvin	27	30	40	50	60	TUN	1
	2700k	3000k	4000k	5000k	6000k	Tunable	RGB
Finishing	W		B		S	X	
	white		black		silver	as per requested	
Wattage	1						


Lighting Customization Solution can offer you modifications for environment with higher options as a customized product.

IP65 SMD McA Step 3 220-240V



A - Ø 40-25mm 35mm



Relative spectral perception of brightness and melanopic effect

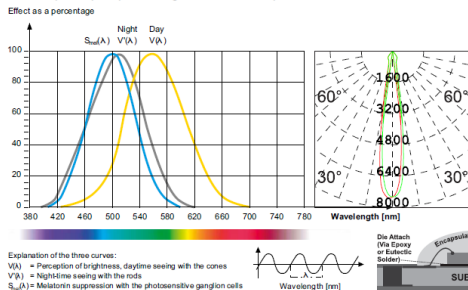

Explanation of the three curves:
 V(A) = Perception of brightness, daytime seeing with the cones
 V'(A) = Nighttime seeing with the rods
 S_n(A) = Melatonin suppression with the photosensitive ganglion cells



Available Accessories

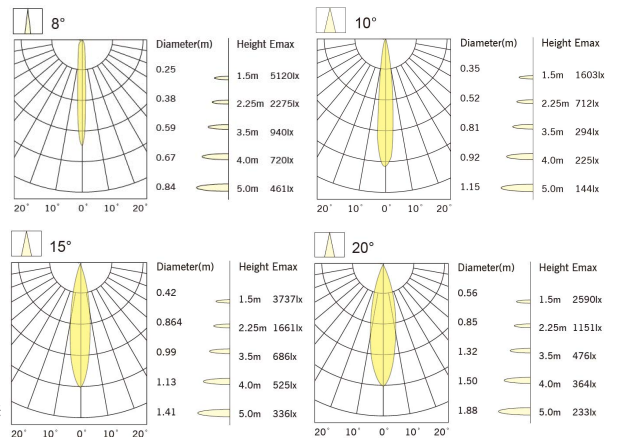

LED life time		Operating time 1.000 h										
Lamp Lumen Maintenance Factor		1	10	20	30	40	50	60	70	80	90	100
Lamp Survival Factor		1	1	1	1	1	1	1	1	0.99	0.99	0.99
L80	50.000 h	LLMF	1	0.96	0.92	0.88	0.84	0.80	0.76	0.72	0.68	0.60
		LSF	1	1	1	1	1	1	0.99	0.99	0.99	0.98
L80	100.000 h	LLMF	1	0.98	0.96	0.94	0.92	0.90	0.88	0.86	0.84	0.80
		LSF	1	1	1	1	1	1	1	0.99	0.99	0.99

