



Simple and easy appearance, in line with contemporary aesthetic concept. The product has the structure and appearance design patent. High efficiency constant current driver, ensure the light source is maximum used. can be easily installed in any type of space, to create amazing light effects, The LED is set back to minimize glare. The main body is made of die-cast aluminum that guarantees optimum heat dissipation with single optic lens family in the most popular sizes and beams with excellent color rendering, and Supreme light quality.

The NOVA Recessed ceiling luminaries adaptable for indoor applications.

High Lumen Efficacy 115 lm/W - UGR<19
 Body - Die cast aluminum housing with solvent free powder coating
 Diffuser - polycarbonate pattern lens
 Glowing Wire Test - 850°
 Temperature - of=20 °C ~ of max=50 °C


FIELDS OF APPLICATION:

Offices, showrooms, restaurants, buildings, shopping malls, museums, convention centers, galleries, etc.

NOVA-A-1-8-27-W-5W



Model --- **NOVA**

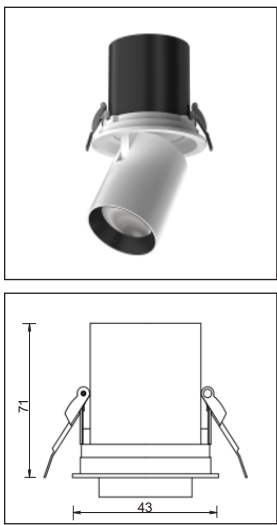

NOVA

X X X X X

Size	A — B — C — D						
Driver	1	2	3	4	5	6	7
	On/Off	Dali	1-10	Phase Dimming	RGBW	Casambi	Tuya
Beam Angle	8° — 15° — 30° — 50°						
Kelvin	27	30	40	50	60	TUN	1
	2700k	3000k	4000k	5000k	6000k	Tunable	RGB
Finishing	W		B		S	X	
	white		black		silver	as per requested	
Wattage	5	7	10	12	15	20	25

Lighting Customization Solution can offer you modifications for environment with higher options as a customized product.


IP20 COB McA Step 3 220-240V



- A - Ø 43-71-27mm 33mm
- B - Ø 52-78-35mm 44mm
- C - Ø 106-100-72mm 88mm
- D - Ø 129-132-83mm 110mm


Relative spectral perception of brightness and melanopic effect

Effect as a percentage


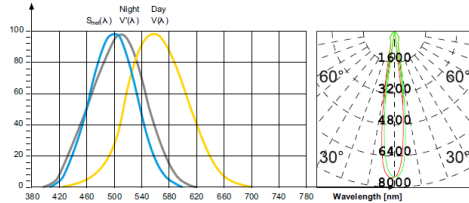


Explanation of the three curves:
 V(λ) = Perception of brightness, daytime seeing with the cones
 V'(λ) = Nighttime seeing with the rods
 S_{rel}(λ) = Melanotin suppression with the photosensitive ganglion cells

Die Attach Via Epoxy or Eutectic Solder



Available Accessories

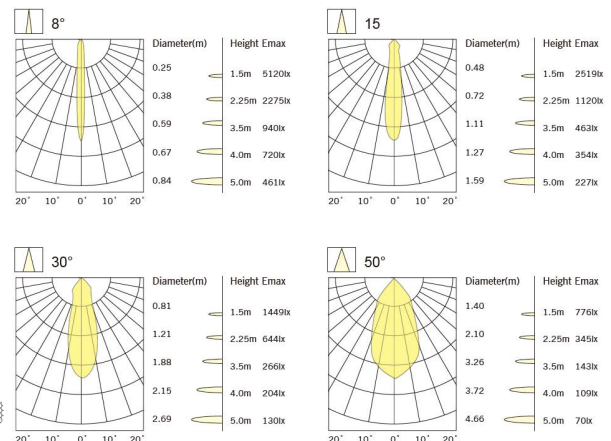

LED life time		Operating time 1.000 h										
Lamp Lumen Maintenance Factor	Lamp Survival Factor	1	10	20	30	40	50	60	70	80	90	100
L80	50.000 h	LLMF	1	0.96	0.92	0.88	0.84	0.80	0.76	0.72	0.68	0.64
		LSF	1	1	1	1	1	1	0.99	0.99	0.99	0.98
L80	100.000 h	LLMF	1	0.98	0.96	0.94	0.92	0.90	0.88	0.86	0.84	0.82
		LSF	1	1	1	1	1	1	1	0.99	0.99	0.99

